

Backup power UPS
3S Mini 36W DC UPS



Eaton 3S Mini UPS

Secure service continuity for connected equipment during power outages with an affordable and compact DC UPS providing power to Internet routers, IP cameras, Home assistants and Smart controllers.



Designed to keep you connected

Keep your critical connected equipment (Internet gateway, IP camera, Smart-home controller, personal assistant, etc..) up and running in the event of a power outage.

Maintain your ability to remote control your connected devices with no loss of power (IP cameras).

Overcurrent protection through internal circuit.

Adaptable

Select from 4 output voltages that are compatible with any critical application power needs and 4 output connector types to adapt to your equipment requirements.

Simple

Easy to read LED indicator providing information about selected output voltage and remaining battery capacity.

Cold-start function available to use 3S Mini as a battery bank.

Compact and silent

3S Mini replaces the power supply provided with your device, to insure power protection without additional equipments.


The super compact, silent and stylish design ensures the 3S Mini blends well into your home or business environment.




Powering Business Worldwide

Eaton 3S Mini UPS


BARREL ADAPTORS INCLUDED:



- 1 On/Off button
- 2 4 LEDs providing output voltage setting or remaining battery capacity.
- 3 Input cord
- 4 Output cord



Typical runtimes

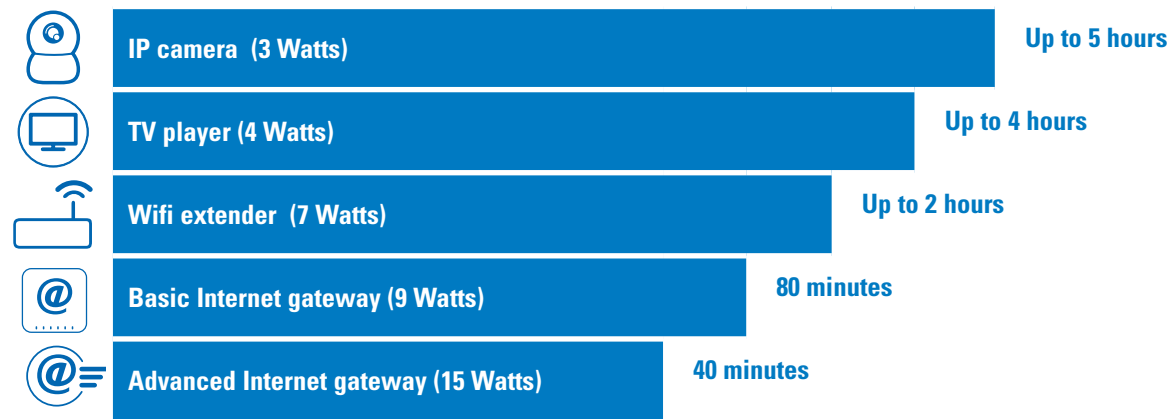

Technical specifications	
Input voltage	90-264V AC
Input frequency	50/60Hz
Output voltage/Amps	9V/3A - 12V/3A - 15V/2,4A - 19V/1,89A
Output connection	Barrel adaptors (5,5 x 2,5 / 5,5 x 2,1 / 4,75 x 1,7 / 3,5 x 1,35)
Power rating	36W
Battery type	Li-Ion
Battery capacity	3,7 V/2200 mAh x 2
UPS dimensions W x H x D	95,5 x 30 x 136 mm
UPS weight	0,4 kg
Operating temperature	0 - 35°C
Safety	IEC 62477-1, CE mark, CB report
EMC	IEC 62040-2
Warranty	2 years

Models		
Part number	3SM36	3SM36BS
Input cord	Schuko (FR/DIN)	BS1363 (UK)

